

Power Switch&CCT Switch LED Track Light-HPD

PUSTLUX[®] **LED TRACK LIGHT - POWER&CCT Switch**
3CCT+3POWER=9PCS LAMP
Triac Dim



D85*140mm=15W/20W/30W

CE, RoHS, and other certification icons.

www.pustlux.com

Additional features: PUSTLUX Intrack Driver, LED C.O.B., 5 Year Warranty, CRI: Ra(90), Beam Angle 38°.

TRACK LIGHTS



Lumens
1500—3000lm

POWER
15—20—30W switchable



The first manufacturer of multi-functional track light in shenzhen

Your Trustworthy LED Track Spot Partner in China

Who needs this track spot?

- Importers/Wholesalers/Distributors

Why you need this track spot?

- Reduce warehouse inventory cost
- Reduce shipping cost
- Reduce product cost
- Reduce management cost
- Expand more market share
- Enhance brand awareness

What Pust provide to you?

- Track spots which solves your existing problems
- Highly cost-effective track spots
- Stable quality
- Reliable after-sales service
- Value-added service (Free sample/Free plate/Free shipping within Guangdong province/Free container loading in our factory)





What is advantage of HPD track spot

- Power swithc,CCT switch,Traic Dimmable in one light
- Power range can be adjustable according to customers' need
- CCT range can be adjustable accoding to customers' need
- **Paper inner bag insteads of plastic bag, more environmentally friendly**
- **Free color stickers, free color box, Free cartons design**



Wattage Switch Options:

- **15-20-30W**
- **10-20-30W**
- **20-25-30W**

CCT Switch Options:

- **3000-3500-4000K**
- **2700-3000-4000K**
- **3000-4000-6000K**



3 Color temperature in one fixture

2700K-3000K-4000K CCT Switchable:



3000K-3500K-4000K CCT Switchable



What was the advantage?

1. Accurate Color Temperature:

The Color temperature tolerance is within $\pm 50K$

SDCM<5

Color Parameters:

Chromaticity Coordinate: $x=0$

Chromaticity Coordinate: $u'=0$

Tc=3002K Dominant WL:Ld=58

Ratio: R=25.8% G=71.6% B=2.6%

Render Index: Ra=91.4

R1 =91 R2 =96 R3 =98

R8 =76 R9 =47 R10=91

Color Parameters:

Chromaticity Coordinate: $x=0$

Chromaticity Coordinate: $u'=0$

Tc=3477K Dominant WL:Ld=58

Ratio: R=23.0% G=73.8% B=3.2%

Render Index: Ra=91.7

R1 =91 R2 =95 R3 =98

R8 =80 R9 =51 R10=89

Color Parameters:

Chromaticity Coordinate: $x=0$

Chromaticity Coordinate: $u'=0$

Tc=4019K Dominant WL:Ld=57

Ratio: R=20.2% G=76.3% B=3.5%

Render Index: Ra=89.3

R1 =88 R2 =92 R3 =96

R8 =79 R9 =44 R10=81

What is the advantage?

2. Self-design Intrack track adapter, CE, CB, C-tick approved

External driver, better for longer lifetime, easy replacement, stable quality control



- Pustlux intrack driver with 3 phase 4 wires adapter
- Power switchable 15w-20w-30w/10w-20w-30w/20-25-30w
- Compatible with Eutrac, Global, Powergear, etc most popular sold tracks in the market
- Flicker free
- Triac Dimmable
- AC220-240v, 5 years warranty

What is the advantage?

3. Patent outlooking design



Aluminum housing, better for heat dissipation

D85*140mm, Cold forging aluminum,

Finished color: powder coated

Matt white RAL9010, Matt black RAL9005

The length is flexible according to your requirements.


What is the advantage?

4. Reflector solution




Alumimum reflector 15/24/36/60degree


Adjustable

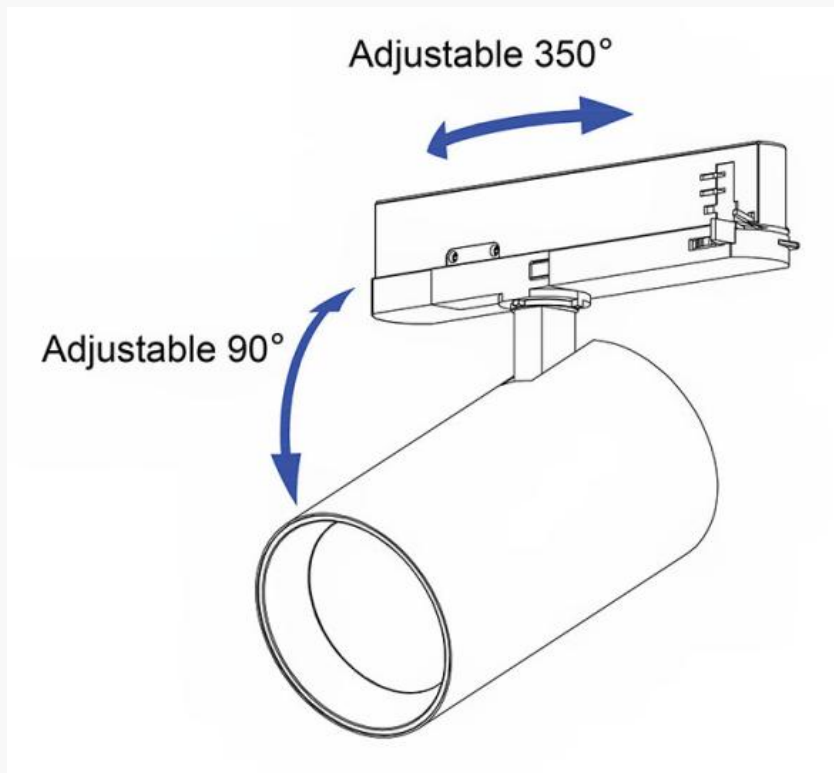

350degree adjustable
horizontal



90degree adjustable
vertical



What is the advantage?

5. Anti glare accessories



Barn doors



Honeycomb

What is the advantage?

Photos with accessories



Barn doors



Honeycomb&Barn doors

Parameters:**Dimension: D85x140mm**

Body materials: Cold forging Aluminum

LED brand: Bridgelux

Intrack adapter: Pustlux self-design


Beam angle: 15/24/36/60°

Lumen output: 90-100lm/W

Track adapter : 3 phase 4 wires

CRI:90+

CCT:3000K-3500K-4000K CCT Switchable or others

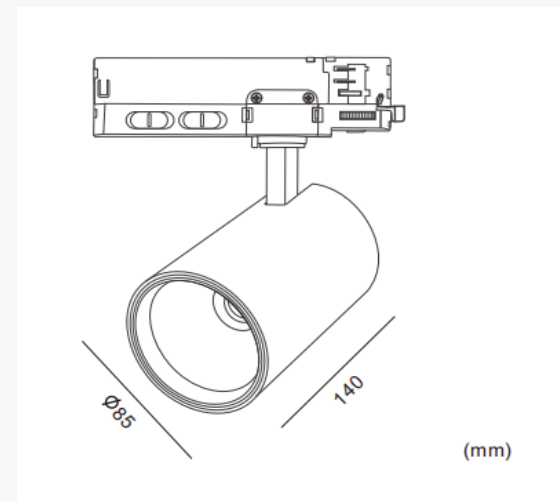

Product No.	Wattage 1	Wattage 2	Wattage 3	Voltage
PU-TL-15W-HPD	10W	15W	20W	AC220-240V
	20W	20W	25W	AC220-240V
	30W	30W	30W	AC220-240V


Packing information



Product No.	Carton size	Qty/CTN	Net Weight/CTN	Gross Weight/CTN	Size
PU-TL-15W-HPD	46*38*37cm	20PCS	13KG	14.2KG	D85X140mm



Installation instruction: AC 230V power supply Power supply cut off before installation

3-PHASE REGULAR TRACK:






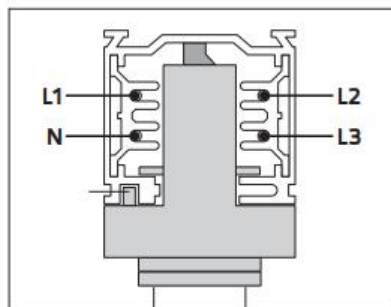


PAY ATTENTION TO THE DIRECTION OF INSTALLATION

Incorrect installation can damage the appliance and render it unusable.

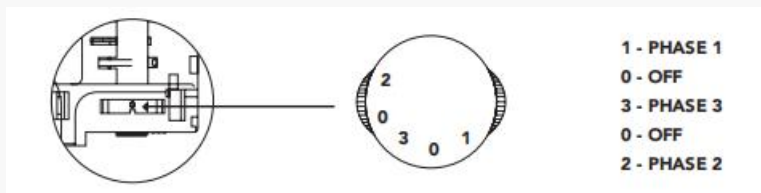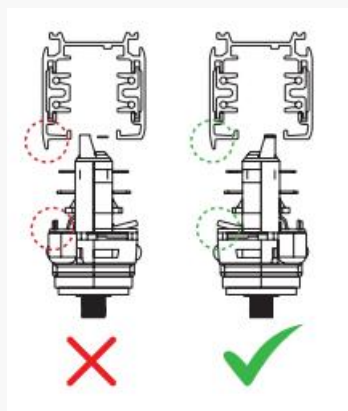


Installation instruction steps:

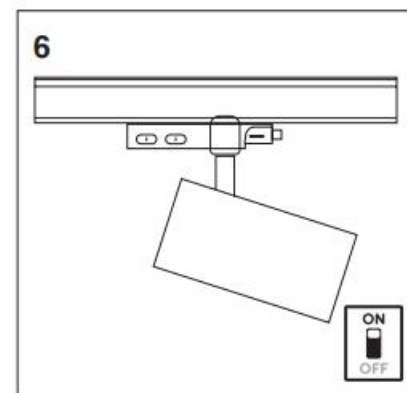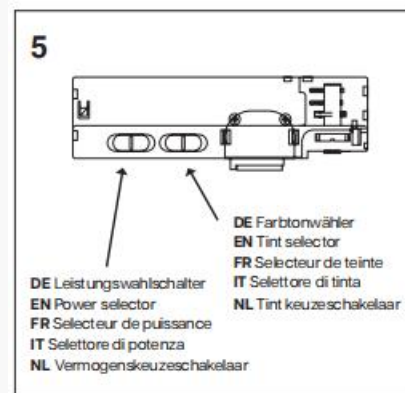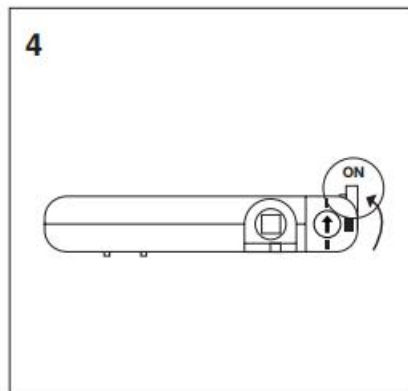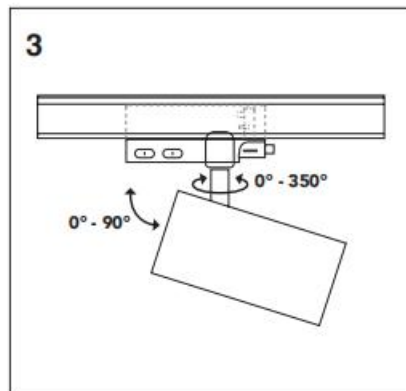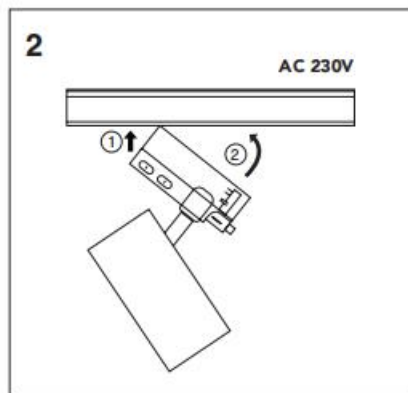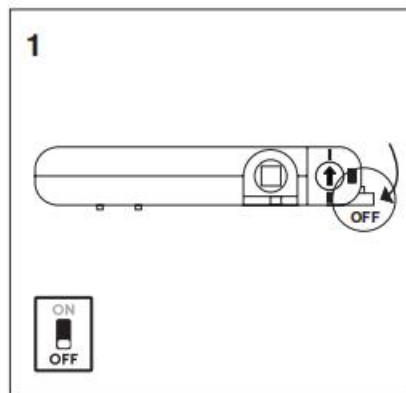


Compatible with Eutrac, Global, Powergear, Cntrac, etc, tracks

SUITABLE FRO THESE TRACK BRANDS:


GLOBAL




POWERGEAR




SG SHOPLINE




NORLUX




EUTRAC




STAFF



HOFFMEISTER



ZUMTOBEL



- Ideal for retail lighting, supermarket, department stores, shops etc.





The End

Thank you

Welcome to visit our factory

Add: 3rd/F, Building 5, Bi'an Industrial Park, Huangfengling Industrial Zone, Luo'zu Community, Shiyan Street, Bao'an District, Shenzhen, China

Whatsapp: 0086-18212611530
Email: info@pustlux.com

Web: www.pustlux.com