

Hope Track Light


multi-functional track light-Power switch&CCT switch&Triac Dim



3rd/F, Building 5, Bi'an Industrial Park, Huangfengling Industrial Zone, Luozu Community, Shiyan Street, Bao'an District, Shenzhen, China

www.pustlux.com

Lightsource	LED
Article Number	PU-TL-15W-HPD
Luminaire Type	Tracklight
Adapter Type	Intrack
Mounting Type	Track
Light Source Product Name	Bridgelux COB
Control Gear	Triac Dimmable
Beam angle	Lens 15/24/36/60°
Wattage	15W-20W-30W Power Switch
Luminous Flux	3000lm max
Efficacy (lm/W)	95-100 lm/W
Color Temperature	3000K-3500K-4000K CCT Switch
warranty	5 years
Color Rendering Index	Ra 90
Color Of Housing	white/black/Silver
IP Rating	20
Lifetime	50 000h (L80 B10)

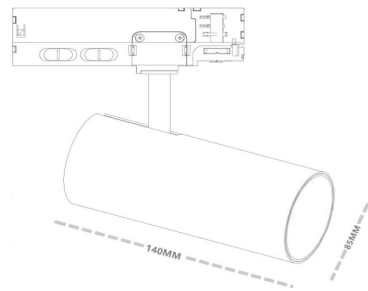

Color Temperature option 2700k-3000k-4000k CCT switch/3000k-4000k-5800k CCT switch

Color Consistency MacAdams 5 SDCM

Material Powder painted cold forging aluminium

UGR 20.1

Package PU-TL-15W-HPD

47*45*37cm 16.5KG

Package PU-TL-35W-HPD

47*45*37cm 18.9KG


Container info.

Installation instruction



Installation Diagram

- Max. allowed weight of complete luminaire: 5 kg (50 N). It is valid for horizontal mounting of track system only
- The mechanical key (A) in the adaptor matches the groove (B) in the track. Rotate of about 90° the lever of the cam (C) until it reaches the locking position
- To open rotate the lever the opposite direction

Insert the adapter into the track

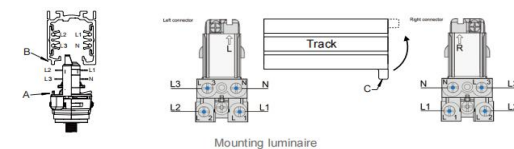

Mounting luminaire

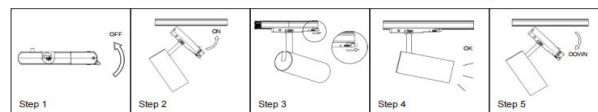

20" Container, fill 275 CTNS,5500PCS
 L589cm 47cm*11=564cm
 W235cm 45cm*5=225cm
 H239cm 37cm*6=222cm
 11*5*6=330cartons*20=6600PCS

For more information, visit us at pustlux.com. We are more than happy to reply to your email at info@pustlux.com